


# tuforte

## barramento

sealing mortar

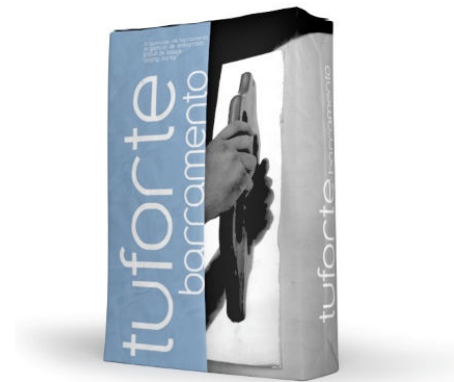

- reference thin

### use

For sealing interior walls and ceilings which have fresh or dry cement finishes. Tuforte Barramento is a product which improves the smooth finish of walls and ceilings with new cement coverings, in restoration work on new or old cement coverings as long as not already covered.

### surface

- Render;
- Concrete.



# TOPECA

FABRICA DE PRODUTOS PARA CONSTRUÇÃO

Rua D. Nuno Álvares Pereira, 53 – 2490-114 Cereal – Ourém – PORTUGAL Tel.: 00 351 – 249 580 070 / Fax.: 00 351 – 249 580 079  
[www.topeca.pt](http://www.topeca.pt) / [geral@topeca.pt](mailto:geral@topeca.pt)

Q.5.06.02.13-03  
16/03/2018

# tuforte barramento

sealing mortar

## recommendations

Do not apply to frozen surfaces or when a risk of frost exists in next 24 hours.

For plastic paint finishes on Tuforte Barramento, first apply:

- A suitable primer (e.g. Regulador de Fundo Topeca); or
- A coat of plastic paint (resin rich) diluted with 50% water.

Allow product to dry between application of successive layers (approximately 4 hours under normal conditions).

Do not apply Tuforte Barramento while drying process is underway.

## composition and characteristics

### Composition:

Hydraulic binders, inert materials and specific fillers.

### Characteristics:

Paste working time: 2 - 3 hours.

Hardening time: 3 - 4 hours.

Application thickness: 0 - 2 mm.

Waiting time before coating: 2-3 days (when applied to dry cement)

Density of Powder: 0.95 g/cm<sup>3</sup>

Application temperature +5°C a +30°C.

NOTE: Results obtained in laboratory tests under normal conditions (T=20°C). May vary depending on application conditions.

## colour

White

## consumption

1Kg/m<sup>2</sup> /mm of thickness.

## available in

Sacks de 20 Kg.

Pallets with 48 sacks.

## storage

1 year from date of manufacture in original sealed package.



**TOPECA**  
FÁBRICA DE PRODUTOS PARA CONSTRUÇÃO


# tuforte barramento

sealing mortar

## preparation of surface

Surfaces must be clean, solid and free of dust, paint, grease and efflorescence.

Surfaces must be flat.

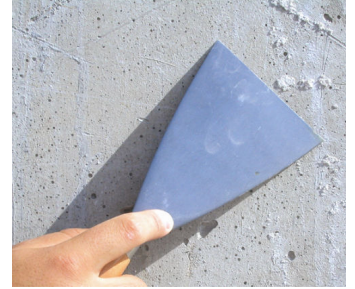


## application

Mix Tuforte Barramento using a mechanical mixer with approximately 13-14 litres of clean water, until a mortar with good consistency is obtained.



The sealing paste should be applied with a metal trowel.

Drying depends on atmospheric conditions (temperature and relative humidity) and absorption by surface.

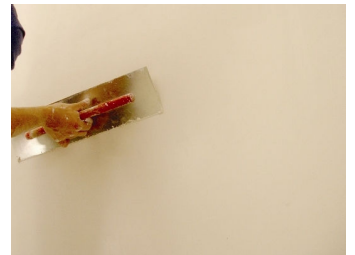

The final layer may be sanded when dry.

