

EPG 400 / EPG 400 WP EWS 400

Work on plaster and sanding of heat insulations




Plaster smoothing machines

EPG 400 and EPG 400 WP







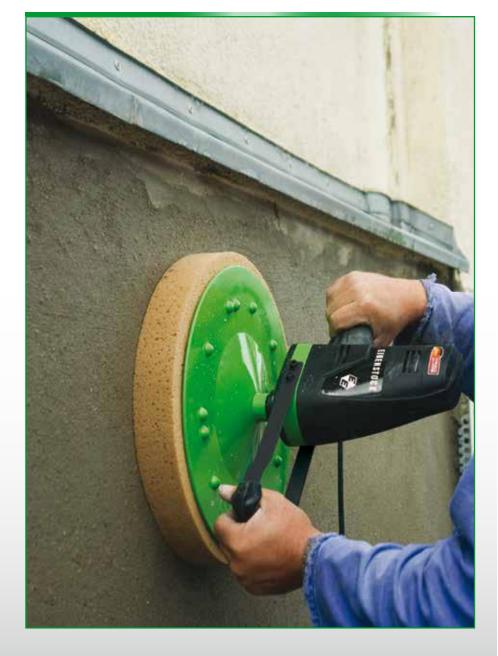

Specifications	EPG 400	EPG 400 WP
Power input	500 W	500 W
Rated voltage	230 V~	230 V~
Rated speed	0-60 rpm	0-60 rpm
No-load speed	0-110 rpm	0-110 rpm
Diameter base plate	370 mm	370 mm
Spindle connection	Push fit fitting/velcro	Push fit fitting/velcro
Weight	3.5 kg	3.8 kg
Order no.	06509000	0650L000
Supplied	in a case incl. base plate and sponge disc	



Smoothing, scraping and structuring of plaster. Sanding of panels for heat insulations. Smoothing and cleaning of surfaces.

Large tool surface – smooth and quick working

Low weight – for effortless work

Vertical motor arrangement, large handles - balanced, ergonomic design, convenient working

Electronic switch – stepless speed control

Triple special gearbox - high torque, powerful, durable

EPG 400 WP in addition with:

Stepless adjustable water supply direct moistening of the wall by means of an atomised spray, saves adding water seperately, thus time saving



We recommend as accessories: **EIBENSTOCK Water tank**

