

# acelerador de presa



## PRODUCT DATA SHEET

TOPECA, Lda  
Rua D. Nuno Alvares Pereira, 53  
2490-114 Cercal – Ourém  
PORTUGAL

Tel.: 00 351 – 249 580 070  
Fax.: 00 351 – 249 580 079


**TOPECA**  
FÁBRICA DE PRODUTOS PARA CONSTRUÇÃO

[geral@topeca.pt](mailto:geral@topeca.pt)  
[www.topeca.pt](http://www.topeca.pt)

# acelerador de presa

special products

for render

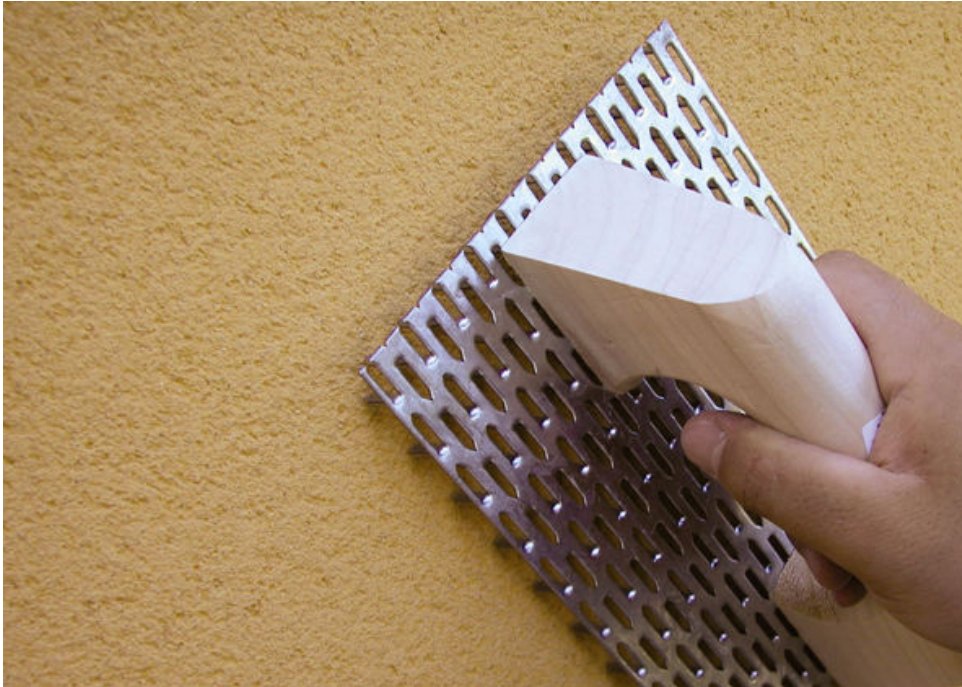

## use

Acelerador Presa Topeca is a liquid setting accelerator solution for monocouche through-coloured renders to speed up the time to scrape during colder application periods.

## surfaces

- Admitted by the plaster and monocouche used.



# acelerador de presa

for render

special products

## recommendations

The Acelerador Presa Topeca is not an antifreeze.  
Do not exceed a dosage of 3 liters Acelerador Presa Topeca by mixing 6 bags of 30Kg.  
Apply at temperatures above 5 ° C.  
Respect the danger symbols contained on the label.  
For more information consult the safety data sheet.  
Acelerador Presa Topeca should not be added to plaster, concrete or monomassa are directly in contact on iron or metal.  
Do not apply plaster + Acelerador Presa Topeca trapped in ice or at risk of freezing in the next 24 hours.

## composition and characteristics

### Composition:

Accelerator stuck in dispersion.

### Characteristics:

Density: 1300 kg/m<sup>3</sup>.

pH: 8-9.

Note: These results were obtained in laboratory tests, under normal conditions (T = 20 ° C) and may vary with conditions.

## consumption

1 liter of a mixture of 6 bags of 30Kg monocouche.

## packaging

Jerricans 5 and 20 liters.

## storage

1 year from the date of manufacture in original packaging, closed under moisture and heat.

## application

Shake well before using.  
Mix Acelerador Presa Topeca in mixing the mortar.  
Replace 1 liter of water per 1 liter of Acelerador Presa Topeca a mixture of 6 bags monocouche.  
Add the mortar to the solution (water + Acelerador Presa Topeca).

